

H A R B O U R

118L Outdoor Beverage Chiller

QUICK START GUIDE



Internal
LED Light

Double Glazed
Heated Door

Lockable
Door

Temp. Range
0-10° C

IN HOME WARRANTY
3
YEAR

TIPS FOR USING & OPERATING YOUR BEVERAGE CHILLER (HBROBF118B)
SUPPORT: 1300 11 4357 | WWW.HARBOUR-APPLIANCES.COM.AU

Tips & Tricks for using your new Beverage Chiller

QUICK START GUIDE: HBROBF118B

Installing Your Beverage Centre

Two person installation: Use two or more able-bodied people to move and install the beverage centre. Failure to do so could result in injury.

Floor surface: This beverage chiller must be properly positioned on a dry, sturdy, level surface that is strong enough to support it when it is fully loaded.

Tropical rating: This rating allows the beverage chiller to be operating effectively in temperatures up to 43° C.


Before connecting the beverage centre to the power source, let it stand upright for approximately 8 hours. This will allow any refrigerant gases that may have been disturbed during the transportation process to settle and reduce the possibility of a malfunction in the cooling system.

For a complete installation guide, refer to the user manual page 11-13.

Positioning the shelves

Position the shelf supports inside the racks on the sides at your desired levels. You can place the shelves firmly on the supports and begin to load your contents.

The Controls

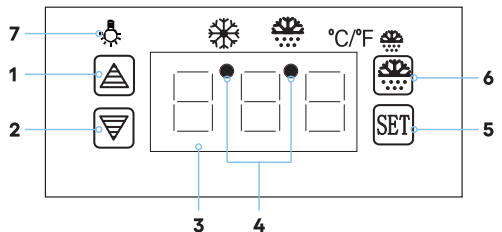

1. Temperature Control: Up Button

2. Temperature Control: Down Button
Press the Up or Down buttons to increase or decrease the temperature inside the Beverage Chiller cabinet in 1° intervals.

3. LED Display

4. Indicator Lights

The left indicator refers to the Cooling Symbol: ❄️
The right indicator refers to the Defrost Symbol: 🧊

5. Set Temperature Button

Press this button to set the desired temperature.

6. Defrost Button

Press this button to manually activate the defrost cycle.

7. Light Function

Press the UP Button to turn the light on or off.